


iHDW-AX 系列規格表

項目 \ 規格	A	B	C	D	E	F	G	H
電源電壓	DC5V±10%	DC5V±10%	DC12V±10%	DC12V±10%	DC5V±10%	DC5V±10%	DC24V±10%	DC24V±10%
脈波數	100PPR	25PPR	100PPR	25PPR	100PPR	25PPR	100PPR	25PPR
輸出電流(VH)	≥4.5V	≥4.5V	≥10V	≥10V	≥4.5V	≥4.5V	≥20V	≥20V
輸出電壓(VL)	≤0.3V	≤0.3V	≤0.3V	≤0.3V	≤0.3V	≤0.3V	≤0.5V	≤0.5V
輸出電流	100mA	100mA	100mA	100mA	80mA	80mA	80mA	80mA
信號格式	A.B	A.B	A.B	A.B	A.B./A./B	A.B./A./B	A.B	A.B
輸出格式	R330	R330	R2.0K	R2.0K	DIFF	DIFF	R2.0K	R2.0K
反應速度	10KHz	10KHz	10KHz	10KHz	10KHz	10KHz	10KHz	10KHz
消耗電流	120mA	120mA	120mA	120mA	120mA	120mA	120mA	120mA
起動扭力(最大)	200g	200g	200g	200g	200g	200g	200g	200g
軸荷量(最小)	R 2kg	R 2 kg	R 2kg	R 2kg	R 2kg	R 2kg	R 2kg	R 2kg
旋轉壽命(最小)	1KKR	1KKR	1KKR	1KKR	1KKR	1KKR	1KKR	1KKR
重量	150g/250g	150g/250g	150g/250g	150g/250g	150g/250g	150g/250g	150g/250g	150g/250g
操作溫度	0/+50	0/+50	0/+50	0/+50	0/+50	0/+50	0/+50	0/+50
保存溫度	-10/+70	-10/+70	-10/+70	-10/+70	-10/+70	-10/+70	-10/+70	-10/+70
操作溼度	35-85%	35-85%	35-85%	35-85%	35-85%	35-85%	35-85%	35-85%
耐振動	0.5G	0.5G	0.5G	0.5G	0.5G	0.5G	0.5G	0.5G
耐衝擊	2G	2G	2G	2G	2G	2G	2G	2G


規格訂購：

SERIES NAME	MODEL	TYPE			DIAMETER		
iHDW	A	TYPE	SPECIFICATION			60	φ 60mm
			DC POWER	ULSE	OUTPUT TYPE	80	φ 80mm
		A	5V	100PPR	R330		
		B	5V	25PPR	R330		
		C	12V	100PPR	R2.0K		
		D	12V	25PPR	R2.0K		
		E	5V	100PPR	DIFF		
		F	5V	25PPR	DIFF		
		G	24V	100PPR	R2.0K		
		H	24V	25PPR	R2.0K		


iHDW-AX-80 外觀尺寸 (mm) :

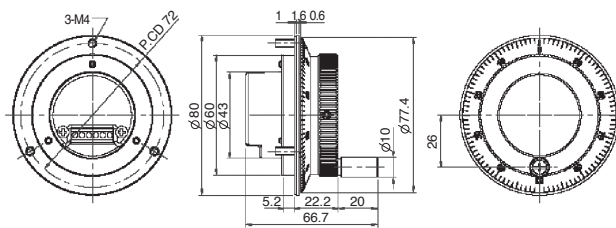

開孔尺寸 (mm) :



iHDW-AX-60 外觀尺寸 (mm) :

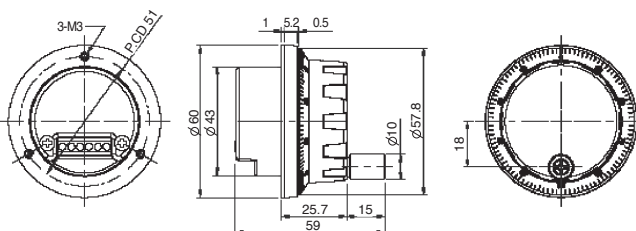

開孔尺寸 (mm) :

